
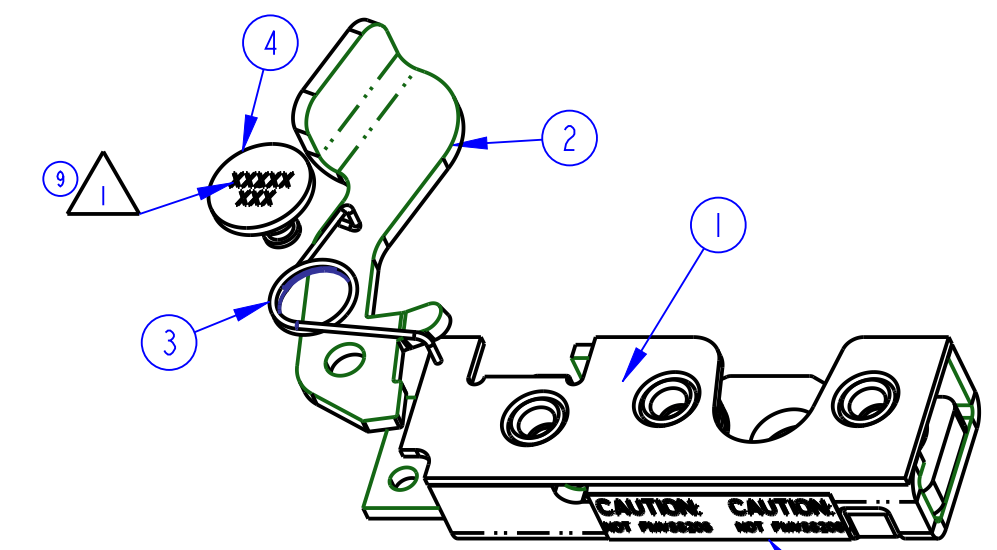
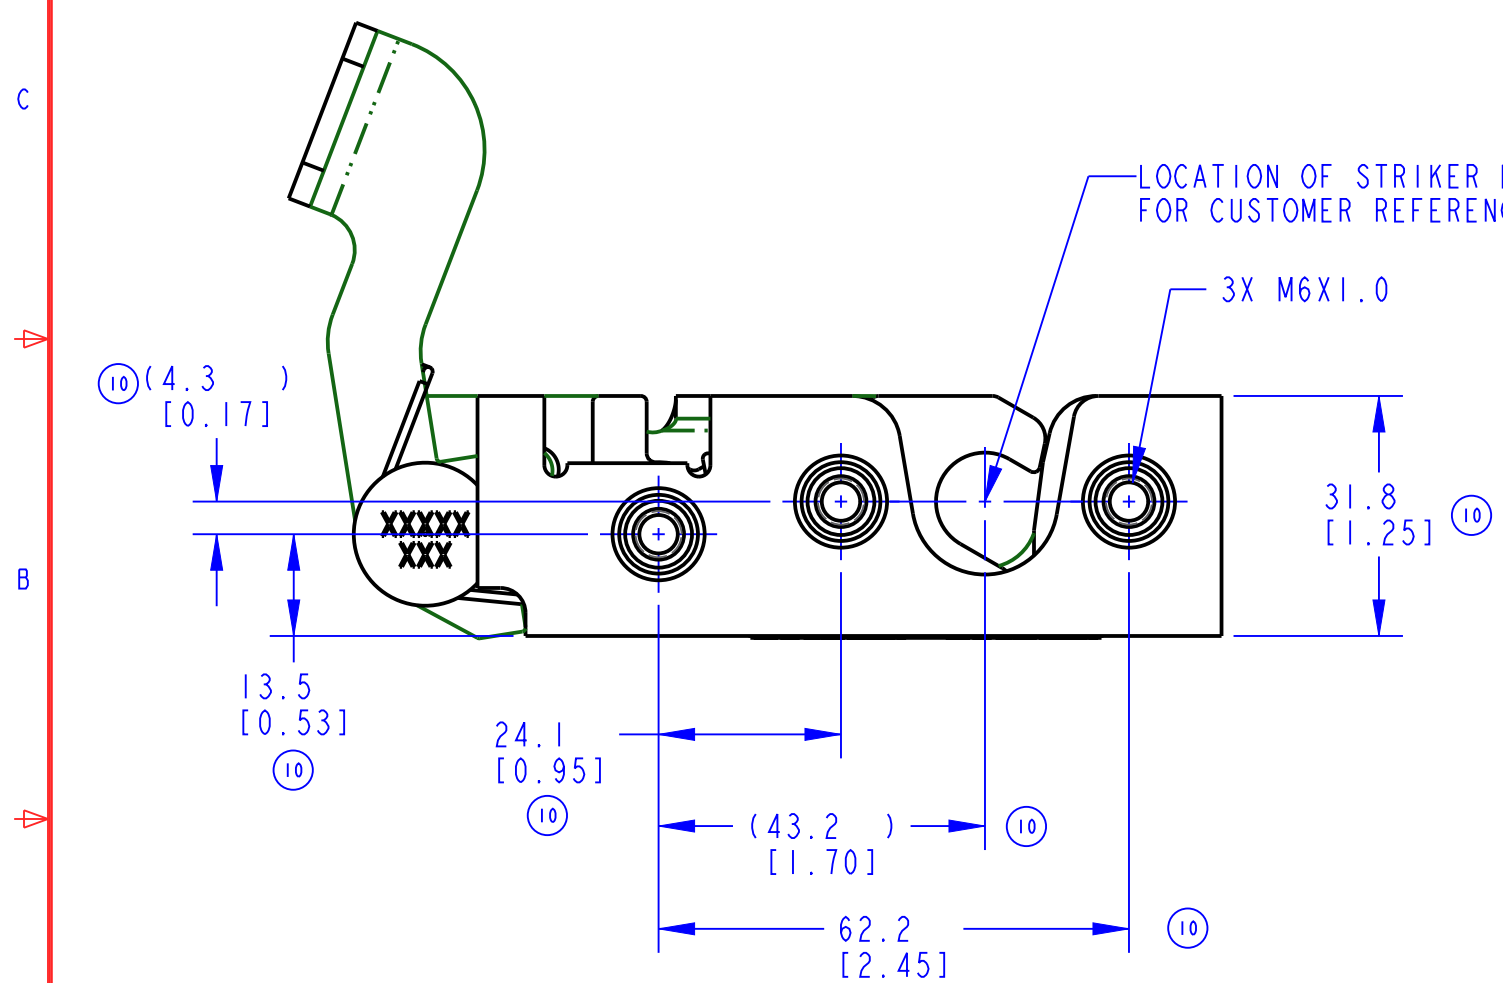
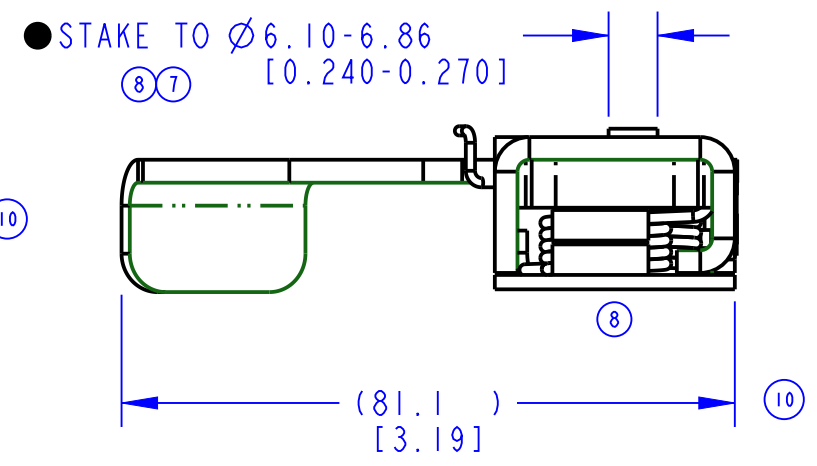


PART NUMBER	ITEM 1 BASE LATCH (QTY)	ITEM 2 LEVER (QTY)	ITEM 3 SPRING (QTY)	ITEM 4 RIVET (QTY)	ITEM 5 LABEL (QTY)	9 PART MARKING
15989-01	0500214-32 (1) 10	16095-01 (1)	16128-01 (1)	81259-16 (1)	81504 (1) 10	

REVISION	ECN	ECN BY	DESCRIPTION
7	20125	MAD 1/26/05	Ø.260-.290 AFTER STAKING WAS Ø.230-.260 AFTER STAKING
8	11662	TAG 07MAR08	FORMAT & HEX TRIVALENT UPDATE, ADD RH VIEW Ø.240/.270 WAS Ø.260/.290
9	31504	GDE 2011-06-06	UPDATED: IMAGE (ITEM 5), PART MARKING, DESCRIPTION.
10	39496	TPL 2016-08-18	IN BOM: ITEM 1 (BASE LATCH) WAS 0500214-02, 81504 WAS 81504-00 ADDED NOTES 2,3,4 & 5 ENVELOPE & MOUNTING DIMS, STRIKER BOLT LOCATION NOTE.

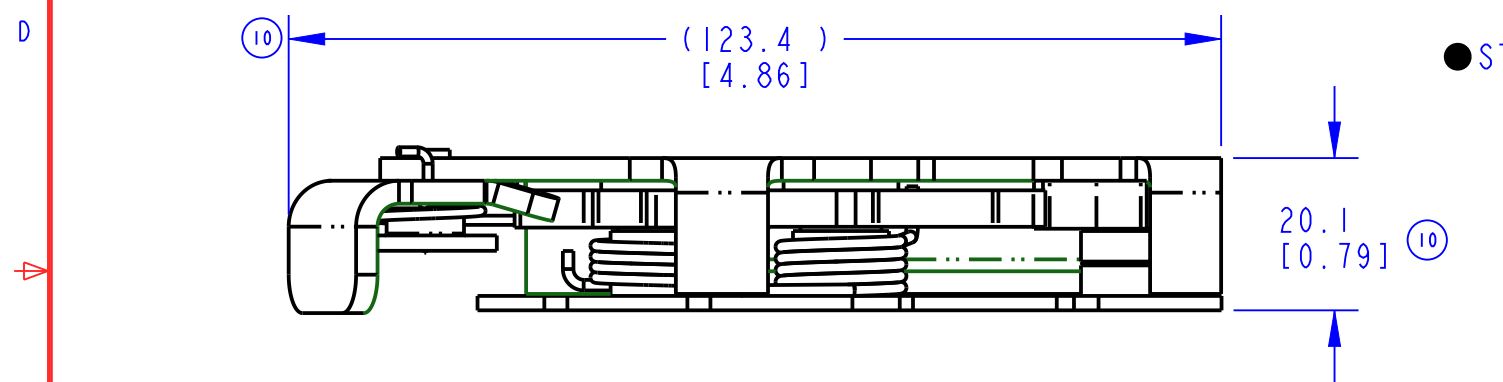

NOTES: UNLESS OTHERWISE SPECIFIED; 10

1 IDENTIFY ASSEMBLY WITH PART NUMBER AND DATE CODE APPROXIMATELY AS SHOWN, OR IN OTHER APPROVED LOCATIONS AS OUTLINED IN ES-121. ORIENTATION OF THE RIVET CONTAINING PART MARKING NOT IMPORTANT.

2. USE WITH TRIMARK'S Ø.500 STRIKER BOLT.

3. TIGHTEN CLASS 8.8 OR BETTER MOUNTING FASTENERS TO THE FASTENERS MANUFACTURER'S RECOMMENDED TORQUE VALUE; HOWEVER DO NOT EXCEED 13.6 Nm [120 IN-LB].

4. DIMENSIONS IN [] ARE FOR REFERENCE ONLY.

4. OPPOSITE HAND ITEM IS 19101-01.

● INDICATES REQUIRED ASSEMBLY INFORMATION.
 UOS: THE -00 VERSION SHALL BE THE UNFINISHED VERSION OF PART SHOWN.
 UOS: ALL DIMENSIONS APPLY BEFORE COATING. (ASME Y14.5M, sec. 2.4.1)

TOLERANCES UNLESS OTHERWISE SPECIFIED (UOS) ASME Y14.5M-1994 INCH MILLIMETER X.X = ±.1 X = ±3 X.XX = ±.03 X.X = ±.8 X.XXX = ±.010 X.XX = ±.25		DRAWN BY JJH	1998-05-11
ANGLES X° = ±3° X.X° = ±1.0° X.XX° = ±.50°		CHECKED BY CML	1998-05-11
PROJECT 98032		PRODUCT CODE E41 (050-0214)	
CUSTOMER			
CUSTOMER PART NUMBER		9 DESCRIPTION 050-0214, LH, I POSN, M6X1, FGR RLSE	
PART WEIGHT (0.29 Kg)		SURFACE AREA	
REF. T/M OP 4.20-2 FOR SUP. QUALITY REQ. REF. T/M OP 4.20-3 FOR INT. QUALITY REQ.		SIZE B	SCALE 1.0
		PART NUMBER 15989	

500 Bailey Avenue
 P. O. Box 350
 New Hampton, Iowa 50659 U.S.A.
 Tel: 641-394-3188
 Fax: 641-394-2392

This drawing and the information contained herein is the property of TriMark Corporation and shall not be used for any purpose without our written consent.